


Electric Conveyor Dryer

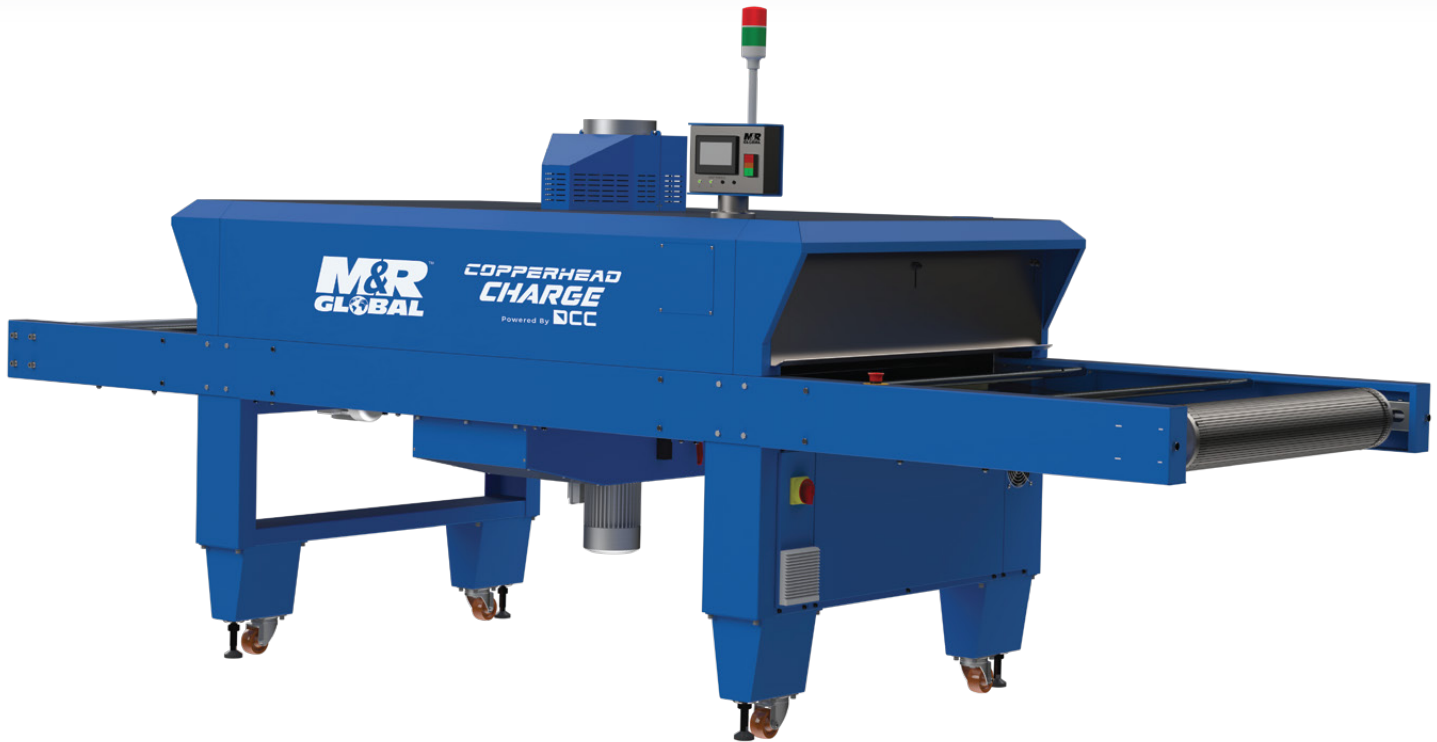

The Copperhead Charge has combined the best curing technology with new innovation to create the ideal startup to medium size shop dryer that can handle all your curing needs.

The Charge's unique design can easily cure waterbase, plastisol, and DTG prints with its advanced airflow system and edge-to-edge heat chamber. Watch your productivity soar while you stay comfortable because of the Charge's Cool Skin technology that keeps the heat inside the dryer and the outside surface cool to touch. Patriot Belt™ with Sure Trak™ roller system helps to keep the belt in place. Digital belt speed readout makes it easy to duplicate conveyor dryer speed settings. Maintenance-free, brushless AC electric motor with variable-frequency drive provides reliable, accurate belt-speed control.

The dryer also includes a manual belt crank allowing operators to rotate the belt manually to remove shirts in-case of power outages. Maximize your efficiency, and handle all your curing needs with the Copperhead Charge Forced Air Conveyor Dryer.


FEATURES

- Slim design & construction
- Patriot belt™ with SureTrak™ roller system
- Available from 24 to 60" belt width & 6 to 16' heat chamber length
- Electric infrared plus forced-air curing technology for exceptional curing performance on a wide variety of inks
- Caster wheels for easy machine displacement
- Icon-based digital touchscreen control panel
- Advanced design ensures consistent temperature throughout the heat chamber
- Belt speed display reflects heat-chamber retention time, making it easy to match ink manufacturers' curing recommendations
- Real-time temperature data for consistent curing results

Find more information and where to buy at: www.mrprintglobal.com

Uniform Heating • Simplified Maintenance • Tool-Free Adjustments

The Charge's unique design can easily cure waterbase, plastisol, and DTG prints with its advanced airflow system and edge-to-edge curing capability.

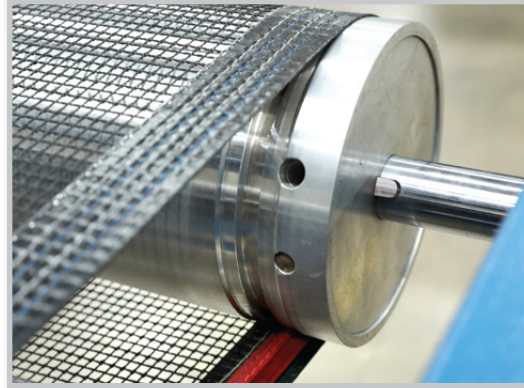

Patriot Belt™ with Sure Trak™ roller system helps to keep the belt in place



Easy-to-reach filters, belt replacement & lubrication points

SPECIFICATIONS	CHARGE 24/6	CHARGE 24/12	CHARGE 36/6	CHARGE 36/12	CHARGE 48/8	CHARGE 48/16	CHARGE 60/8	CHARGE 60/16
Belt Width	61 cm (24")	61 cm (24")	91.4 cm (36")	91.4 cm (36")	122 cm (48")	122 cm (48")	152.4 cm (60")	152.4 cm (60")
Electrical Requirements¹	208-230, 1ph, 60A, 50/60 Hz, 10.9 kW (UL) 208-230, 3ph, 35A, 50/60 Hz, 10.9 kW (UL) 400-440 V, 3ph, 20 A, 50/60 Hz, 10.9 kW (CE)	208-230, 1ph, 118A, 50/60 Hz, 21.7 kW (UL) 208-230, 3ph, 70A, 50/60 Hz, 21.7 kW (UL) 400-440 V, 3ph, 40 A, 50/60 Hz, 21.7 kW (CE)	208-230, 1ph, 90A, 50/60 Hz, 16.1kW (UL) 208-230, 3ph, 51A, 50/60 Hz, 16.1kW (UL) 400-440 V, 3ph, 30 A, 50/60 Hz, 16.1 kW (CE)	208-230, 3ph, 101A, 50/60 Hz, 32 kW (UL) 400-440 V, 3ph, 60 A, 50/60 Hz, 32 kW (CE)	208-230, 3ph, 97A, 50/60 Hz, 30.7 kW (UL) 400-440 V, 3ph, 56 A, 50/60 Hz, 30.7 kW (CE)	208-230, 3ph, 192A, 50/60 Hz, 61 kW (UL) 400-440 V, 3ph, 111 A, 50/60 Hz, 61 kW (CE)	208-230, 3ph, 120A, 50/60 Hz, 38.1 kW (UL) 400-440 V, 3ph, 70 A, 50/60 Hz, 38.1 kW (CE)	208-230, 3ph, 238A, 50/60 Hz, 75.7 kW (UL) 400-440 V, 3ph, 138 A, 50/60 Hz, 75.7 kW (CE)
Exhaust Blower System	20 cm (7.9") : 8650 l/min (308 cfm) @ 1.32 mmwc (0.05"wc)	2 nos. x 20 cm (7.9") : 8650 l/min (308 cfm) @ 1.32 mmwc (0.05"wc)	20 cm (7.9") : 8650 l/min (308 cfm) @ 1.32 mmwc (0.05"wc)	2 nos. x 20 cm (7.9") : 8650 l/min (308 cfm) @ 1.32 mmwc (0.05"wc)	24 cm (9.8") : 8650 l/min (308 cfm) @ 1.32 mmwc (0.05"wc)	2 nos. x 24 cm (9.8") : 8650 l/min (308 cfm) @ 1.32 mmwc (0.05"wc)	24 cm (9.8") : 8650 l/min (308 cfm) @ 1.32 mmwc (0.05"wc)	2 nos. x 24 cm (9.8") : 8650 l/min (308 cfm) @ 1.32 mmwc (0.05"wc)
Heat Chamber Length	183 cm (72")	366 cm (144")	183 cm (72")	366 cm (144")	244 cm (96")	488 cm (192")	244 cm (96")	488 cm (192")
Overall Length	396.5 cm (156 ")	579.5 cm (228.15)	396.5 cm (156 ")	579.5 cm (228.15)	488 cm (192")	732 cm (288")	488 cm (192")	732 cm (288")
Overall Width	95.3 cm (37.4")	95.3 cm (37.4")	125.6 cm (49.4")	125.6 cm (49.4")	156.3 cm (61.5")	156.3 cm (61.5")	186.7 cm (73.5")	186.7 cm (73.5")
Overall Height	179.2 cm (70.6")	179.2 cm (70.6")	179.2 cm (70.6")	179.2 cm (70.6")	179.2 cm (70.6")	179.2 cm (70.6")	179.2 cm (70.6")	179.2 cm (70.6")
Radiant Panel	4	8	4	8	6	12	6	12
Standard Infeed Length	641 kg (1413 lbs)	991 kg (2185 lbs)	745 kg (1643 lbs)	1320 kg (2910 lbs)	985 kg (2171 lbs)	1680 kg (3704 lbs)	1117 kg (2462 lbs)	1908 kg (4206 lbs)
Standard Outfeed Length	122 cm (48")	122 cm (48")	122 cm (48")	122 cm (48")	122 cm (48")	122 cm (48")	122 cm (48")	122 cm (48")
Total Machine Weight	91.5 cm (36")	91.5 cm (36")	91.5 cm (36")	91.5 cm (36")	122 cm (48")	122 cm (48")	122 cm (48")	122 cm (48")

¹ General usage may vary, but will be significantly less than stated values. Use uninterruptible power supply (UPS) to safeguard machine from voltage fluctuation out of main supply. If incoming voltage differs from the voltage(s) listed in the brochure, calculate amperage accordingly.

M&R Printing Equipment, Inc. • www.mrprint.com
440 Medinah Road, Roselle, Illinois 60172-2329 USA

DCC Group • www.mrprintglobal.com
802, Kamla Executive Park, JB Nagar, Andheri (E), Mumbai, 400059, India

USA: 800-736-6431 / 630-858-6101 • Outside USA: +1-847-967-4461 • India: +91 98719-88775

M&R Printing Equipment, Inc. and its subsidiaries (hereinafter M&R), believe the information in this advertisement to be accurate at publication, though it does not purport to list all manufacturing and specification variations, nor does it assume liability resulting from incompleteness or inaccuracy. M&R reserves the right to change specifications without notice. M&R expressly disclaims any liability for damages, consequential or incidental, from purchase, installation, servicing, and/or use of any product/service based upon information herein. No warranties of merchantability or fitness for a particular purpose are made or are to be implied from the information herein. No information herein may be reproduced or used in any manner without the prior, express written consent of M&R in each case. Copyright 2022 M&R Printing Equipment, Inc. All rights reserved. 20221013E